

# B6G



- Stainless/ alloy steel IP66 single point load cell
- Suitable for single or double load cell structured platform scales
- Recommended platform size: 600x600mm

### Features

- Capacities: 100kg~600kg
- High accuracy
- Low profile and easy installation



Specifications		
Capacity	kg	100/150/200/250/300/500/600
Accuracy		C3
Maximum Number of Verification Intervals	Nmax	3000
Minimum Number of Verification Intervals	Vmin	E <sub>max</sub> /10000
Output Sensitivity	(mV/V)	2.0±0.002
Input Resistance	(Ω)	384±4
Output Resistance	(Ω)	351±2.0
Insulation Resistance	(MΩ)	≥5000 (50VDC)
Zero Balance	(%FS)	1.5
Temperature, Compensated	(°C)	-10~+40
Temperature, Operating	(°C)	-35~+70
Excitation, Recommended	(V)	5~12 (DC)
Excitation, Max	(V)	18 (DC)
Safe Overload	(%FS)	150
Ultimate Overload	(%FS)	300

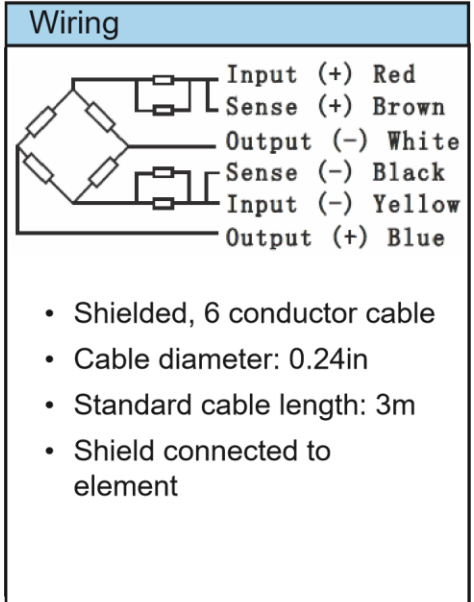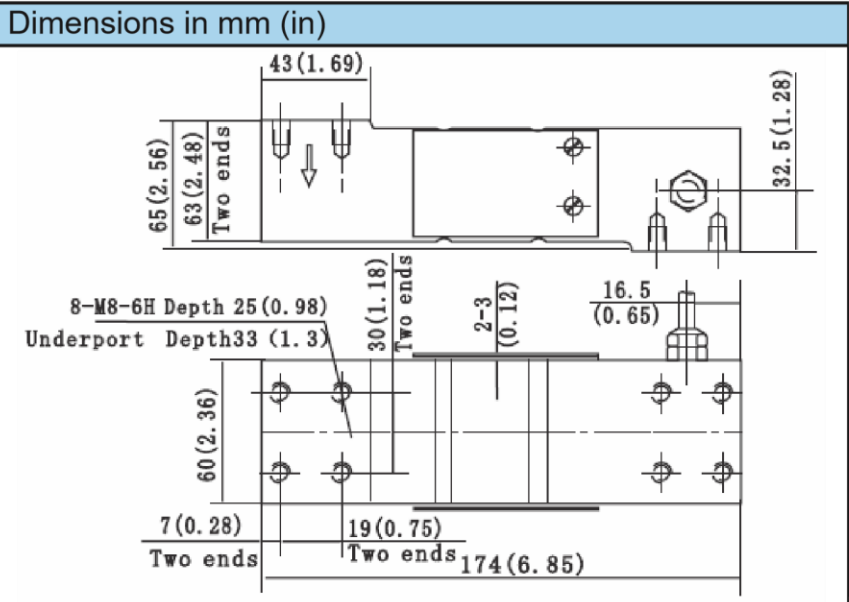

# **C A M B R I D G E**

## **ZEMIC** **LOAD CELLS**

<b><u>MODEL</u></b>	<b><u>DESCRIPTION</u></b>	<b><u>CAPACITY</u></b>	<b><u>LIST</u></b>
<b>B6G-XX- 3B6</b>	<b>STAINLES STEEL SINGLE POINT</b>	<b>50 KG</b>	<b>\$ 480.</b>
	<b>MEDIUM ENVELOPE LOAD CELL IP 67 RATED</b>	<b>100 KG</b>	<b>\$ 480.</b>
		<b>150 KG</b>	<b>\$ 480.</b>
		<b>200 KG</b>	<b>\$ 480.</b>
		<b>250 KG</b>	<b>\$ 480.</b>
		<b>300 KG</b>	<b>\$ 480.</b>
		<b>500 KG</b>	<b>\$ 480.</b>
		<b>600 KG</b>	<b>\$ 480.</b>

**F.O.B.: HONEY BROOK, PA**

**PRICES EFFECTIVE: 01/01/18**

**PRICES SUBJECT TO CHANGE WITHOUT NOTICE**