
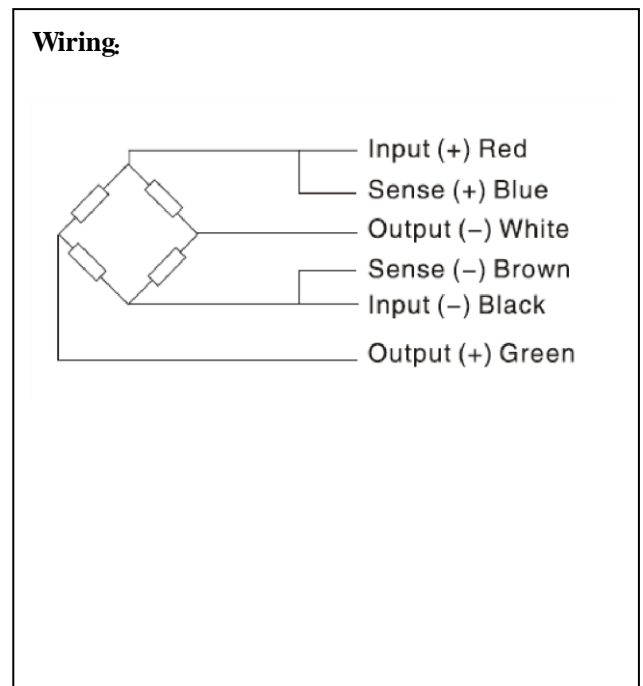


B6T LOAD CELL

Capacity	kg	100,250,500,635
Accuracy class		C3
Combined error 技术指标:	(%FS)	$\leq \pm 0.02$
Creep	(%FS/30min)	$\leq \pm 0.02$
Linearity error	%FS	$\leq \pm 0.02$
Temperature effect on sensitivity	(%FS/10°C)	$\leq \pm 0.011$
Temperature effect on zero	(%FS/10°C)	$\leq \pm 0.015$
Output sensitivity	(mV/V)	2.0±0.2
Input resistance	(Ω)	400±20 Ω
Output resistance	(Ω)	350±3 Ω
Zero balance	(%FS)	1.5
Temperature compensated	(°C)	-10~+40
Temperature allowed	(°C)	-35~+70
Excitation Recommended	(V DC)	5-12
Excitation Max	(V)	18 (DC)
Safe overload	(%FS)	150
Ultimate overload	(%FS)	300
Corner correction		0.02%load value/100mm

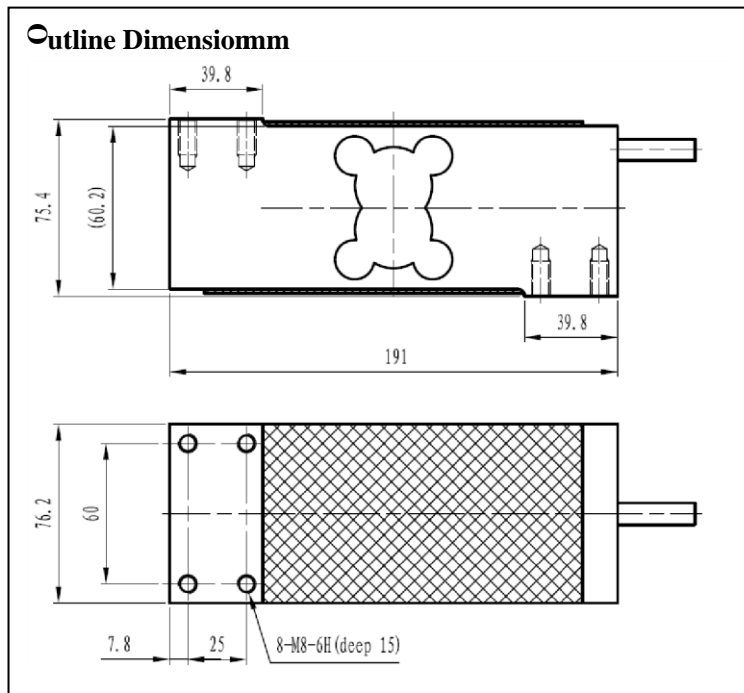

C A M B R I D G E

ZEMIC **LOAD CELLS**

<u>MODEL</u>	<u>DESCRIPTION</u>	<u>CAPACITY</u>	<u>LIST</u>
B6T-XX- 3YB6	STAINLES STEEL	100 KG	\$ 750.
	SINGLE POINT		
	LARGE ENVELOPE	150 KG	\$ 750.
	LOAD CELL		
	IP 67 RATED	200 KG	\$ 750.
		250 KG	\$ 750.
		300 KG	\$ 750.
		500 KG	\$ 750.
	635 KG	\$ 750.	
	1000 KG	\$ 750.	

INTERCHANGE WITH:

FLINTEC MODEL: PCB

SENSORTRONICS MODEL: 60060-SS

F.O.B.: HONEY BROOK, PA

PRICES EFFECTIVE: 01/01/17

PRICES SUBJECT TO CHANGE WITHOUT NOTICE